
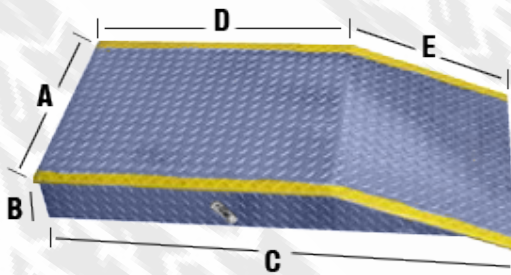
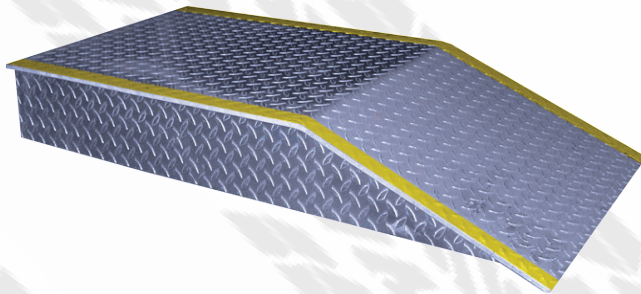


Aluminum Wheel Ramps

In many cases, smaller trucks are substantially lower than most standard docks. Our aluminum wheel ramps raise the back of the truck, bringing it more in-line with the dock height.

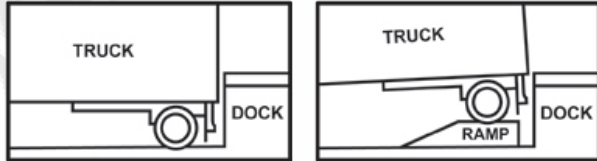

A		A		B	C	D	E
18" Wide		24" Wide		Height	Length		
P/N	Weight	P/N	Weight		Overall	Level	Incline
PR-18-6-48	64 lbs	PR-24-6-48	79 lbs	6"	48"	30"	18"
PR-18-6-60	77 lbs	PR-24-6-60	94 lbs		60"	42"	18"
PR-18-6-102	126 lbs	PR-24-6-102	145 lbs		102"	84"	18"
PR-18-8-54	78 lbs	PR-24-8-54	94 lbs	8"	54"	30"	24"
PR-18-8-60	85 lbs	PR-24-8-60	103 lbs		60"	36"	24"
PR-18-8-108	147 lbs	PR-24-8-108	169 lbs		108"	84"	24"
PR-18-10-60	95 lbs	PR-24-10-60	115 lbs	10"	60"	30"	30"
PR-18-10-66	102 lbs	PR-24-10-66	124 lbs		66"	36"	30"
PR-18-10-72	111 lbs	PR-24-10-72	133 lbs		72"	42"	30"
PR-18-10-114	166 lbs	PR-24-10-114	188 lbs	12"	114"	84"	30"
PR-18-12-72	125 lbs	PR-24-12-72	143 lbs		72"	36"	36"
PR-18-12-78	137 lbs	PR-24-12-78	153 lbs		78"	42"	36"
PR-18-12-120	188 lbs	PR-24-12-120	213 lbs		120"	84"	36"

Wheel Ramps (PR)

- **All aluminum** construction makes them lightweight and easy to maneuver.
- **Durable** and maintenance free.
- **Large** variety of heights and lengths are available to suit most applications.
- **Available** in 18" and 24" widths
- **Optional** welded tabs allow ramps to be bolted to ground, helping deter theft.
- **Capacity:** 12,000 lb per ramp
- **Exclusive 2 year warranty!**

To Select Your Ramp:

A–Width. Based on the maximum wheel width of your largest vehicle. For dual wheel vehicles, choose the 24" wide option and use the ramp at the inside wheel location.

B–Height. Determined by the following formula:

$$\begin{aligned} \text{Dock Height} + 2" &= \underline{\hspace{2cm}} \\ \text{Minus (-) Truck Bed Height} &= \underline{\hspace{2cm}} \\ \text{Ramp Height} &= \underline{\hspace{2cm}} \end{aligned}$$

Can't find your height? Choose the next highest standard height in the chart.